




ROCKLAND HARDFACING

Protect Your Investment


Different Patterns For Specific Applications



Waffle
Sand & dirt







Perpendicular To Flow
Sand & dirt



Parallel To Flow
Rock, slag or
metal to metal

WHAT YOU GET:

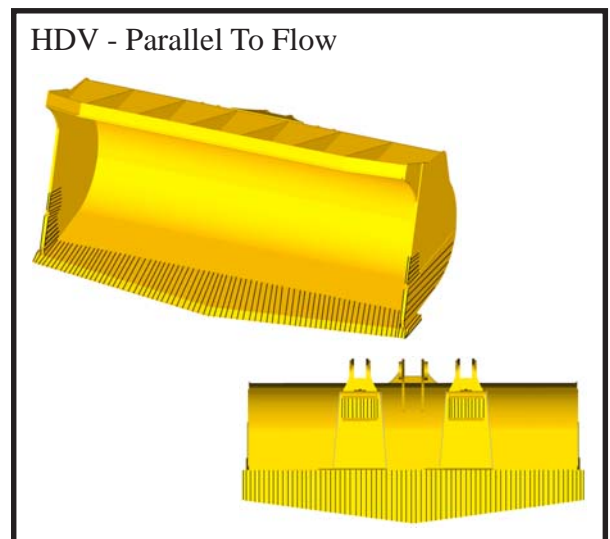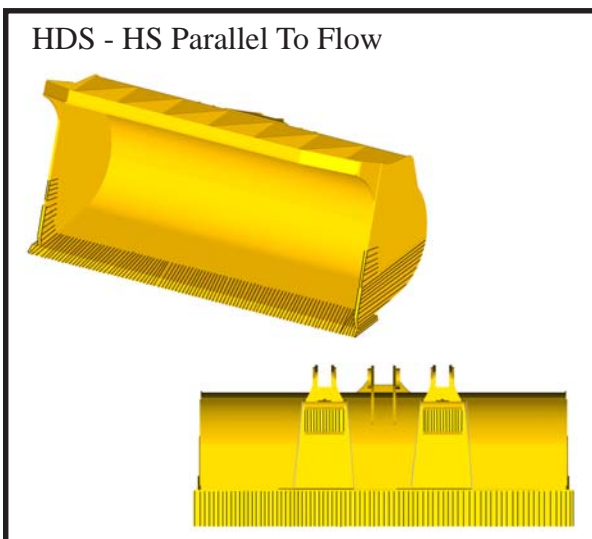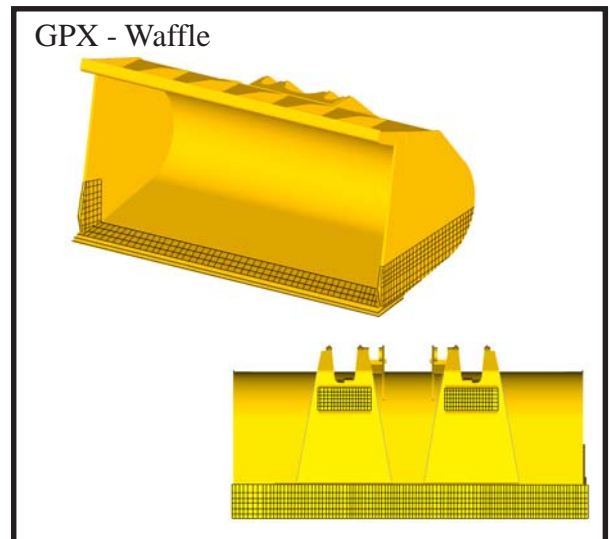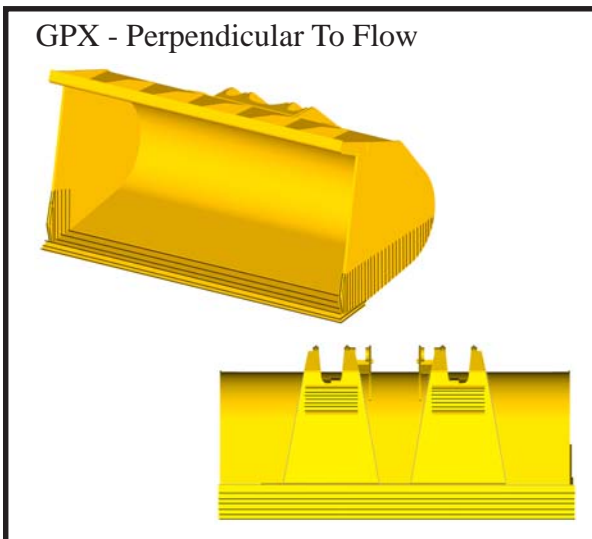

Prices and Wire Specs

We recommend:



Lincore 60-0 7/64 for severe abrasion, moderate impact (Rock and Slag)

Lincore 65-0 7/64 for severe abrasion, light impact (Sand and Dirt)

Lincore 50 7/64 for metal to metal (Car Body Forks, Excavator Grapples)



Carbide Embedded Overlay - The ultimate in protection. Perfect for resisting severe abrasion, moderate impact, and high temperatures. Features a higher friction coefficient for gripping and is 2 to 4 times more wear resistant than standard hardfacing. In some cases, carbide embedded overlay can increase wear life up to 5 times. Call us at 800-458-3773 for more information.

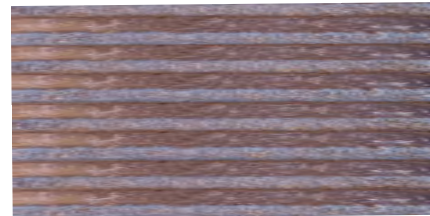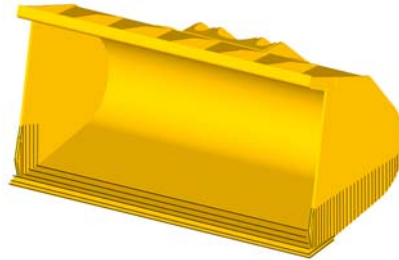

Favorite hardfacing wire? Please let us know, we will be glad to quote!

For specific prices call, e-mail or fax information about wire type, patterns, bucket model and capacity.

CONTACT US

Phone: 800-458-3773

E-mail: sales@rocklandmfg.com

Fax: 814-623-7214



Distributed by:

**ROCKLAND MANUFACTURING CO.
P O BOX 5
BEDFORD, PA 15522
www.rocklandmfg.com**