



# CBF Car Body Forks

## TOUGHER THAN A JUNKYARD DOG




CBF Car Body Forks were designed specifically for auto salvage yards. Tapered tines with beveled tips insure easy separation from the load. The fixed, high strength, heat-treated alloy steel tines are matched to the capacity of your loader for maximum productivity.

### BUILT FOR YOUR APPLICATION

Rockland CBF Car Body Forks are available with a wide variety of options that insure your new car body fork will deliver maximum results in your application. All Rockland Car Body Forks are available with the following options:

- Optional backframe height – for loading and unloading large stacks of cars or increased visibility
- Rubber bumpers – for effectively handling parts cars while avoiding dents and damage
- Tapered tines in either direction – for preventing truck bed damage or loading cars from ground level
- Tine lengths – to suit your application's needs (see reverse for more information)

Optional backframe height

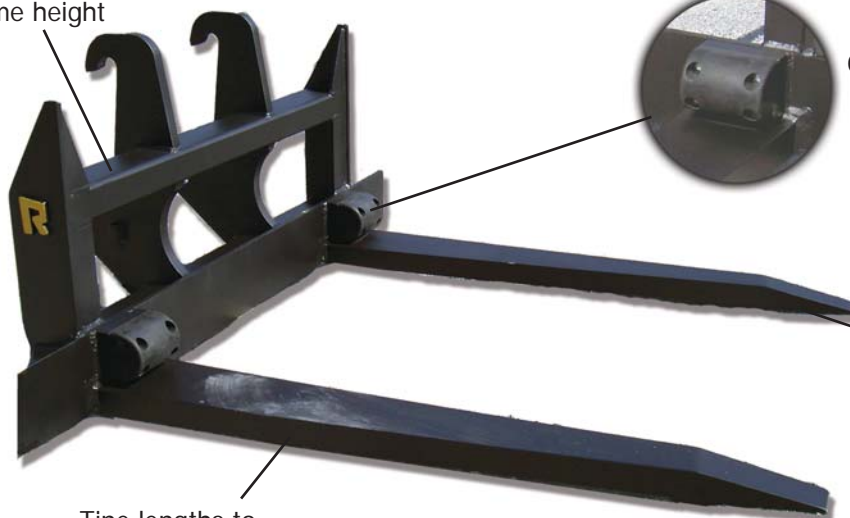

Optional rubber bumpers

Tine tapered on the top or bottom

Tine lengths to suit your application

# BUILT TO LAST

Rockland CBF Car Body Forks are tough and they won't take a bite out of your pocketbook or the maintenance budget. The entire unit is built of tough, weight-saving, alloy steels that deliver years of dependable service. The solid frame also does double duty as a dozer to keep yards level, fill low spots, or keep scrap out of the way. If you handle crushed cars with a loader, specify Rockland CBF Car Body Forks.



Car Body Forks With Optional Longer Tines

## SPECIFICATIONS

Machine Category	5	10	20	30	40
Overall Width	90" 2286	90" 2286	90" 2286	90" 2286	90" 2286
Height	25" 635	28" 711	30" 762	34" 864	34" 864
Width (over tines at frame)	65" 1651	65" 1651	65" 1651	65" 1651	65" 1651
Standard Tines	2" x 72" 51 x 1829	2" x 72" 51 x 1829	2.5" x 72" 64 x 1829	3" x 72" 76 x 1829	3" x 72" 76 x 1829
Weight	1250 567	1380 626	1690 766	1970 894	2060 934
Optional Tines	2" x 84" 51 x 2134	2" x 84" 51 x 2134	2.5" x 84" 64 x 2134	3" x 84" 76 x 2134	3.5" x 84" 89 x 2134
Weight	1350 612	1490 676	1820 826	2125 964	2400 1089
Optional Tines	2" x 96" 51 x 2438	2" x 96" 51 x 2438	2.5" x 96" 64 x 2438	3" x 96" 76 x 2438	3.5" x 96" 89 x 2438
Weight	1450 658	1590 721	1950 885	2280 1034	2580 1170

Machine Category	50	60	70	80
Overall Width	90" 2286	90" 2286	90" 2286	90" 2286
Height	38" 635	38" 711	45.75" 762	46" 864
Width (over tines at frame)	65" 1651	65" 1651	65" 1651	65" 1651
Standard Tines	3.5" x 72" 89 x 1829	4" x 72" 102 x 2134	4" x 72" 102 x 2134	4" x 72" 102 x 2134
Weight	2360 1070	3575 1622	4145 1880	6145 2787
Optional Tines	3.5" x 84" 89 x 2134	4" x 84" 102 x 2134	4" x 84" 102 x 2134	6" x 84" 152 x 2134
Weight	2590 1175	3740 000	4340 000	7000 000
Optional Tines	3.5" x 96" 89 x 2438	4" x 96" 102 x 2438	4" x 96" 102 x 2438	6" x 96" 152 x 2438
Weight	2730 1238	3965 1799	4570 2073	7610 3452

## OPTIONAL LONGER TINES

Machine Category	20	30	40	50	60	70	80
Overall Width	90" 2286	90" 2286	90" 2286	90" 2286	90" 2286	90" 2286	90" 2286
Height	30" 762	34" 864	34" 864	38" 965	38" 965	45.75" 1162	46" 1168
Width (over tines at frame)	44" 1118	44" 1118	44" 1118	44" 1118	65" 1651	65" 1651	65" 1651
Optional Tines	2.5" x 144" 64 x 3658	3" x 144" 76 x 3658	3" x 156" 76 x 3962	3.5" x 156" 89 x 3962	4" x 144" 102 x 3658	4" x 144" 102 x 3658	4" x 144" 102 x 3658
Weight	2870 1302	3340 1515	3495 1585	4660 2114	4765 2161	5480 2486	10545 4783
Optional Tines		3" x 156" 76 x 3962	3" x 168" 76 x 4267	3.5" x 168" 89 x 4267			
Weight		3520 1597	3660 1661	4820 2186			

(mm/kg)

Specifications subject to change without notice.

## INSTALLATION INFORMATION

All Rockland CBF Car Body Forks mount in place of the standard bucket using factory pins or specified coupler brackets.



**ROCKLAND  
MANUFACTURING CO.**  
P.O. Box 5 | Bedford, PA 15522  
800-458-3773 | www.rocklandmfg.com  
**INCREASING PRODUCTIVITY  
FOR MORE THAN 60 YEARS**

## WARRANTY

Rockland CBF Car Body Forks are guaranteed against failure due to defective design, materials, or workmanship for a period of one year or 2,000 hours.