



LIGHT MATERIAL U-BLADES

LM COAL • WC WOODCHIP • SL LANDFILL

LM COAL BLADES—PROVEN ON COAL PILES AROUND THE WORLD

For coal pile productivity, the Rockland LM Coal Blade cannot be beat. The length, height, and wing angles of the LM blade were developed specifically for highly productive coal dozing. More tractor horsepower than ever before is dedicated to pushing coal.

Rockland LM Coal Blades feature job-matched cutting edges, high-strength alloy steel moldboards, and rugged box-frame construction for years of dependable service. Knowledgeable coal pile superintendents specify Rockland LM Coal Blades because they know Rockland LM Coal Blades are designed for productivity and built to last.

WC WOODCHIP BLADES THE CHIP PILE CHAMP

Rockland WC Woodchip Blades turn an ordinary tractor into a woodchip moving machine. The Rockland WC is built for one purpose—moving woodchips economically and efficiently. Rockland woodchip blades have proven themselves on chip piles from Canada to Florida.


All Rockland WC blades are built of high-strength, weight-saving alloy steel so that most of the tractor's horsepower is spent pushing chips. The extended end plates help contain the load. Moldboard height and width ratio were designed specifically for efficient chip dozing. For maximum productivity and years of dependable service, specify a proven Rockland WC Woodchip Blade.

SL LANDFILL BLADES FOR EFFICIENT TRASH DOZING

Lower landfill dozing costs with a Rockland SL Landfill Blade. Whether it be pushing large loads of trash and debris or spreading cover, the SL blade improves productivity because these blades were designed specifically for landfill operations.

From the heat-treated, reversible cutting edges to the top of the oversized moldboard, Rockland SL blades prove they mean business. The extra height and visibility "windows" help operators produce more with less effort. Rockland SL Landfill Blades are built entirely of high-strength, weight-saving alloy steel plate for years of maximum productivity and dependable service.

LM

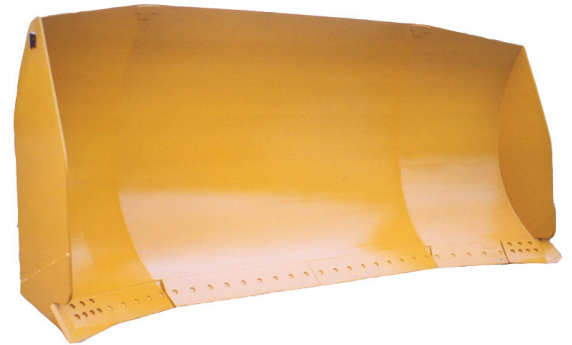

WC



SL



SPECIFICATIONS

LM COAL U-BLADE

Machine Category	25	30	40	50	60	60	70	80	80	90	90	100	110
Capacity YD ³	8 6.12	11.6 8.87	15 11.48	24.5 18.74	32 24.48	38 29.07	45 34.43	48 36.72	56 42.82	56 42.82	60 45.88	82 62.73	95 72.68
Width	12' 3658	13' 3962	15'6" 4725	18' 5486	18' 5486	22' 6706	22' 6706	22' 6706	20' 6096	22' 6706	22' 6706	24' 7315	24' 7315
Height	48" 1219	60" 1524	60" 1524	75" 1905	83" 2108	79" 2007	88" 2235	93" 2362	108" 2743	96" 2438	102" 2591	115" 2921	120" 3048
Wing Angle	25°	25°	25°	25°	30°	30°	30°	30°	30°	30°	30°	30°	30°
Cutting Edges	3/4"x 8" 19 x 203	3/4"x 8" 19 x 203	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1-1/8"x 13" 29 x 330	1-1/8"x 13" 29 x 330	1-1/8"x 13" 29 x 330	1-1/8"x 13" 29 x 330	1-1/8"x 13" 29 x 330	1-1/2"x 13" 38 x 330
Weight lbs.	2500 1135	4000 1816	5900 2679	7400 3357	9300 4222	10500 4767	13000 5902	14100 6401	14900 6765	15850 7190	16200 7348	19350 8785	22800 10351

(mm/kg)

Specifications subject to change without notice.

WC WOODCHIP U-BLADE

Machine Category	25	30	40	50	60	60	70	80	90	100
Capacity YD ³	12 9.18	18.4 14.08	23 17.6	36 27.54	50 38.25	60 45.9	68 52.02	75 57.38	90 68.85	120 91.8
Width	12' 3658	14' 9" 4496	16' 4877	18' 3" 5563	20' 6096	22' 6706	22' 6706	22' 6706	24' 7315	24' 7315
Height	60" 1524	60" 1676	75" 1905	92" 2337	100" 2540	103" 2616	110" 2794	118" 2997	122" 3099	144" 3658
Wing Angle	25°	25°	25°	25°	30°	30°	30°	30°	30°	30°
Cutting Edges	3/4"x 8" 19 x 203	3/4"x 8" 19 x 203	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1-1/8"x 13" 29 x 330	1-1/8"x 13" 29 x 330	1-1/8"x 13" 29 x 330
Weight lbs.	4200 1907	4800 2179	5800 2633	7400 3357	11000 4994	13500 6129	14500 6583	16000 7264	19200 8717	20000 9080

(mm/kg)

Specifications subject to change without notice.

SL LANDFILL U-BLADE

Machine Category	25	30	40	50	60	70	80
Capacity YD ³	9.5 7.27	11.6 8.87	21 16.07	34 26.01	45 34.43	54 41.31	56 42.84
Width	10' 3048	11' 3353	14' 4267	17' 5182	20' 6096	22' 6706	22' 6706
Height	66" 1676	68" 1727	76" 1930	90" 2286	94" 2388	96" 2438	100" 2540
Wing Angle	25°	25°	25°	25°	30°	30°	30°
Cutting Edges	3/4"x 8" 19 x 203	3/4"x 8" 19 x 203	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1"x 10" 25 x 254	1-1/8"x 13" 29 x 330
Weight lbs.	3100 1407	3500 1589	5500 2497	7900 3587	10300 4676	13900 6311	14500 6583

(mm/kg)

Specifications subject to change without notice.

MOUNTING INFORMATION

Rockland Light Material U-Blades come complete with all necessary attaching brackets, ready to mount on standard push beam assemblies using standard factory pins.



ROCKLAND MANUFACTURING CO.
P.O. Box 5 | Bedford, PA 15522
800-458-3773 | www.rocklandmfg.com
INCREASING PRODUCTIVITY FOR MORE THAN 60 YEARS

WARRANTY

Rockland Light Material U-Blades are guaranteed against failure due to defective design, workmanship, or materials for a period of one year or 2,000 hours.