



# PROGRESSIVE LINK BUCKET THUMBS

## ACCURATELY HANDLE MATERIAL

When your application requires precise load handling and material placement, a Rockland Progressive Link Bucket Thumb is the right tool for the job. Progressive link thumbs enable an excavator to pick, place, and handle all types of material that can't be handled with a bucket alone.

### ***More Effective Material Placement And Superior Load Control***

Rockland Progressive Link Bucket Thumbs pivot on the stick pin of the excavator and rotate up to 160 degrees *with the bucket*. This means that the operator can precisely pick and place material at maximum stick extension *and* securely clamp material when maneuvering the load.

### **KEY FEATURES**


- Up to 160° rotation for material handling accuracy.
- Cushioned thumb cylinder with rod guard protects cylinder from damage.
- Easily pick and place material at maximum stick extension.
- Securely clamp loads when rotating thumb and bucket.
- No interference with bucket when thumb is not in use.
- Lubricated, replaceable heat-treated pins and bushings.
- Matched to your bucket's teeth.
- Coupler models available.
- High-strength alloy steel construction.
- 1 year, 2,000 hour Rockland warranty.



*Easily handle bulky material.*



*Precisely pick and place material.*

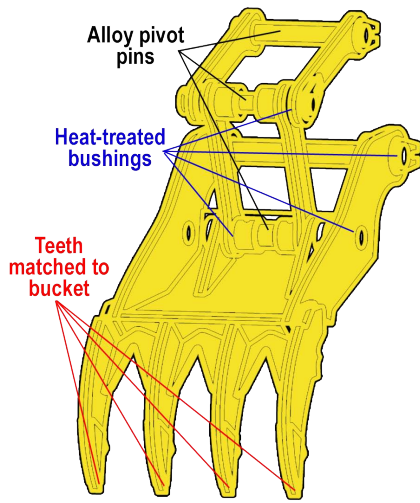

## Designed For Your Machine

All Rockland Progressive Link Thumbs are designed specifically to work with your machine and bucket. They feature replaceable, heat-treated bushings and alloy pivot pins at all pivot points, and will always mesh with your bucket's teeth. Pin-mounted bucket thumbs are also available. All Rockland Progressive Link thumbs are covered by Rockland's one year, 2,000 warranty.

# SPECIFICATIONS

## PROGRESSIVE LINK

| EXCAVATOR CLASS        | AA                               | A                                | B1                               | B2                               | C                                |
|------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| EXCAVATOR WEIGHT       | 10,001 LBS.<br>TO<br>21,000 LBS. | 21,001 LBS.<br>TO<br>32,000 LBS. | 32,001 LBS.<br>TO<br>40,000 LBS. | 40,001 LBS.<br>TO<br>49,000 LBS. | 49,001 LBS.<br>TO<br>60,000 LBS. |
| STANDARD LENGTH WEIGHT | 450                              | 905                              | 1345                             | 1385                             | 1695                             |
| COUPLER LENGTH WEIGHT  | 470                              | 920                              | 1400                             | 1435                             | 1725                             |

| EXCAVATOR CLASS        | D                                | E                                 | F                                  |
|------------------------|----------------------------------|-----------------------------------|------------------------------------|
| EXCAVATOR WEIGHT       | 60,001 LBS.<br>TO<br>78,000 LBS. | 78,001 LBS.<br>TO<br>101,000 LBS. | 101,001 LBS.<br>TO<br>160,000 LBS. |
| STANDARD LENGTH WEIGHT | 1800                             | 2185                              | 2425                               |
| COUPLER LENGTH WEIGHT  | 1850                             | 2230                              | 2550                               |

## PIN-MOUNTED

| EXCAVATOR CLASS        | AA                               | A                                | B1                               | B2                               | C                                |
|------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| EXCAVATOR WEIGHT       | 10,001 LBS.<br>TO<br>21,000 LBS. | 21,001 LBS.<br>TO<br>32,000 LBS. | 32,001 LBS.<br>TO<br>40,000 LBS. | 40,001 LBS.<br>TO<br>49,000 LBS. | 49,001 LBS.<br>TO<br>60,000 LBS. |
| STANDARD LENGTH WEIGHT | 400                              | 785                              | 1220                             | 1250                             | 1335                             |
| COUPLER LENGTH WEIGHT  | 420                              | 800                              | 1325                             | 1365                             | 1610                             |

| EXCAVATOR CLASS        | D                                | E                                 | F                                  |
|------------------------|----------------------------------|-----------------------------------|------------------------------------|
| EXCAVATOR WEIGHT       | 60,001 LBS.<br>TO<br>78,000 LBS. | 78,001 LBS.<br>TO<br>101,000 LBS. | 101,001 LBS.<br>TO<br>160,000 LBS. |
| STANDARD LENGTH WEIGHT | 1425                             | 1585                              | 1730                               |
| COUPLER LENGTH WEIGHT  | 1615                             | 1795                              | 2015                               |

(mm/kg)

Specifications subject to change without notice.

## WARRANTY

Rockland Progressive Link Bucket Thumbs are guaranteed against failure due to defective design, materials, or workmanship for a period of one year or 2,000 hours.



Distributed by:

**ROCKLAND MANUFACTURING CO.**  
 P O BOX 5  
 BEDFORD, PA 15522  
 800-458-3773  
[www.rocklandmfg.com](http://www.rocklandmfg.com)