




HA POWER ANGLE TILT BLADES

**OUTSIDE MOUNT FOR TOUGH
APPLICATIONS
AND MORE PRODUCTIVITY**

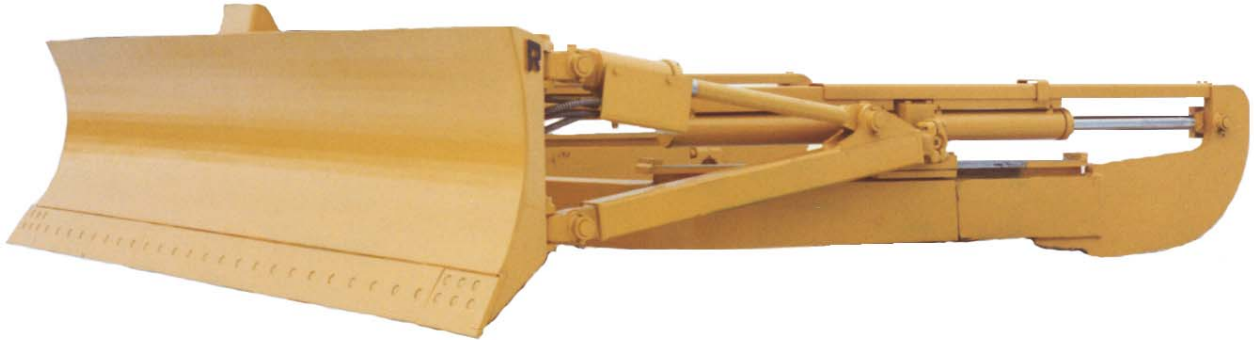

AVAILABLE FOR CRAWLER TRACTORS FROM 65 TO 190 HORSEPOWER

Rockland HA Power Angle Tilt Blades really make sense. They are productive, versatile, and tough!

Compared to standard inside-mount PAT blades, they push more because they are wider. When angled a full twenty-five degrees, they always cover the tracks. They grade better because of greater width and improved tractor stability. Last but not least, they can handle any dozing application required. They are tough and built for years of dependable service.

Compared to conventional angle dozers, Rockland HA blades provide unequalled versatility and more productivity. They provide instant, on-the-go hydraulic adjustment for all blade positions. With a Rockland HA blade, operators can instantly adjust blade pitch, tilt, and angle to best suit changing job conditions. They do not have to stop the tractor or leave the operator's seat. Dozing time is maximized. Blade adjustment time is completely eliminated.

COMPLETE WITH TRUNNION MOUNTED C-FRAMES

HA Power Angle Tilt Blades are a complete unit. The rugged angle dozer blade is mounted on a tough C-frame and supported on each end by heavy-duty hydraulic tilt struts that connect to hydraulically powered angling blocks. The C-frame mounts on standard factory trunnions. Standard, inside-mount power angle tilt blades simplify tractor transportation. However, many do not cover the tracks when fully angled or do not angle a full twenty-five degrees. Most are not recommended for tough dozing applications. If productivity is more important to you than ease of transportation, you need a Rockland HA Power Angle Tilt Blade on your tractor.

HA OUTSIDE-MOUNT POWER ANGLE TILT BLADE

Note: Some blades are narrower when possible.


SPECIFICATIONS

[Click here to identify your machine category.](#)

Machine Category	20	20	25	25	30	30
Track Gauge	STD	LGP	STD	LGP	STD	LGP
Width	12' 3658	13'4" 4064	13'6" 4115	15'6" 4724	13'8" 4166	16' 4877
Height	28" 711	28" 711	37" 940	37" 940	37" 940	40" 1016
Weight lbs.	4250 1928	4865 2207	6445 2923	6785 3078	6515 2955	7220 3275

(mm/kg)

Specifications subject to change without notice.

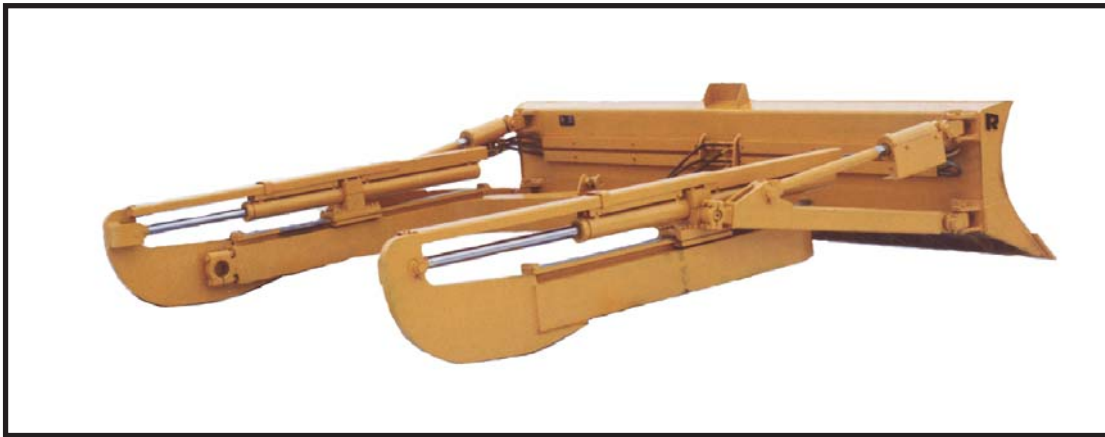

MOUNTING INFORMATION

The tractor must be equipped with lift cylinders, outside-mounted trunnions, a three-spool valve, and plumbing from the valve to the front of the tractor.

WARRANTY

Rockland HA Blades are guaranteed against failure due to defective design, workmanship or materials for a period of one year or 2,000 hours.



Distributed by:

ROCKLAND MANUFACTURING CO.
P O BOX 5
BEDFORD, PA 15522
www.rocklandmfg.com